


# BLOLITE™ PLENUM 5mm MICRODUCT

Microducts are empty tubes of a composite construction, comprising an inner layer optimized for the Blolite system and an outer layer of plenum-rated flame retardant material. Microducts are 5mm OD and 3.5mm ID. All plenum Microducts are orange in color and are printed with product identification and sequential length marking at one-meter intervals.



Up to twelve fibers can be installed simultaneously into each Microduct using the Blolite blown fiber installation technique. Fibers can also be removed from the duct by using the same technique.

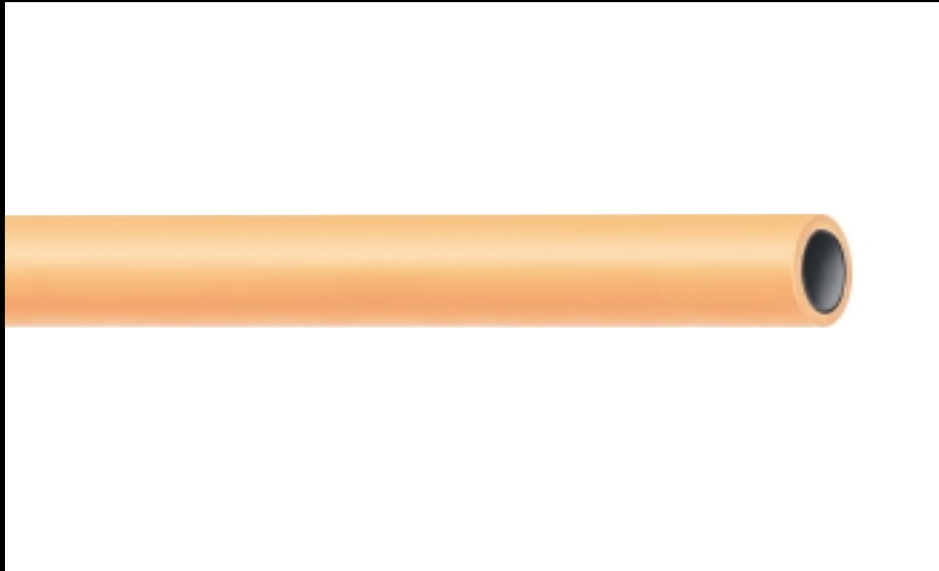

Installation capability is a function of the following:

- compressed air pressure and flow rate
- size and length of microduct
- number of fibers
- number of bends in the duct route

INSTALLATION TENSION | 50N (11 lbs)

TEMPERATURE RANGE | Storage: -30°C to + 80°C  
Installation: -10°C to + 65°C  
Operating: -20°C to + 70°C

MINIMUM BEND RADIUS  
INSTALLED: 25mm (1.0")  
INSTALLATION: 40mm (1.6")

MAX. CRUSH RESISTANCE | 450N (100 lbs)

MAX. INTERNAL PRESSURE | 140 PSI

COMPLIANCE | ETL TYPE OFNP  
c(ETL) TYPE OFNP

NOMINAL WEIGHT | kg/km: 17.8 | lbs/1000': 12.0

## ORDERING INFORMATION

PART NUMBER	DESCRIPTION
FC9700006	5mm Microduct, plenum

### NOTES

1. Standard lengths are 500 and 1000 feet, supplied on non-returnable reels. Ends are sealed to prevent the penetration of moisture prior to shipping.



4 Tesseneer Drive  
Highland Heights, KY 41076-9753  
Phone: 1-800-371-2178  
Fax: 1-859-572-8530  
www.blolite.net



A GenStone and General Cable Joint Venture Company