
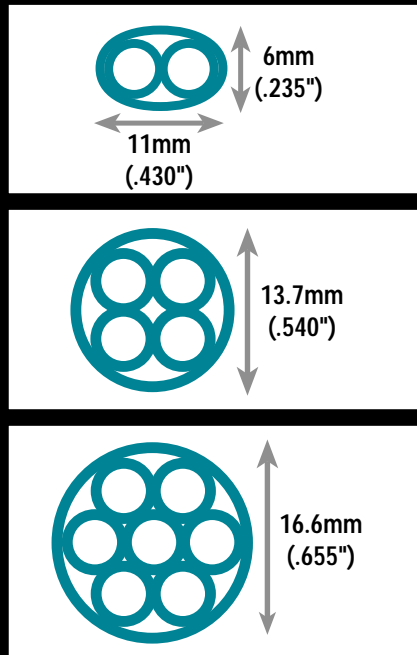


BLOLITE™ INDOOR NON-PLENUM 5mm MULTIDUCT

Riser-rated Multiduct consist of a number of 5mm OD/3.5mm ID Microducts (see 5mm Non-Plenum Microduct data sheet). The Microduct tubing is covered by an outer jacket. The number of Microduct constructions available are 2, 4 or 7. All non-plenum Microducts are blue in color and are printed with a unique number at regular intervals. The overall jacket is a riser-rated PVC material colored orange. The outer jacket surface has product identification printing and sequential length marking at one-meter intervals.

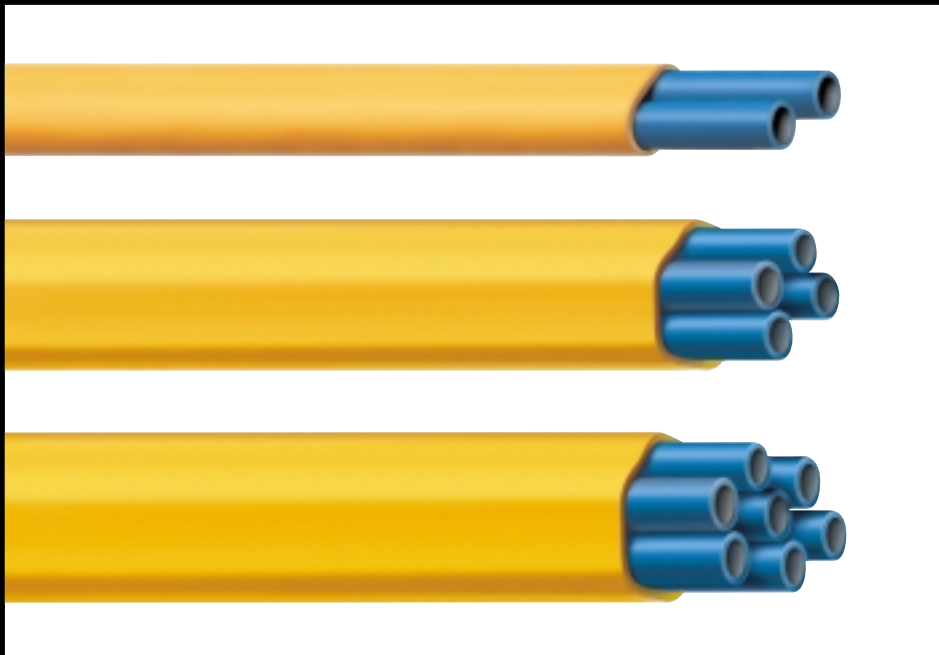

INSTALLATION TENSION	2 way	300N (67 lbs)
	4 way	500N (112 lbs)
	7 way	700N (157 lbs)
MINIMUM BEND RADIUS INSTALLED INSTALLATION	10X Multiduct outer diameter	
	20X Multiduct outer diameter	
MAX. INTERNAL PRESSURE	140 PSI	
COMPLIANCE	ETL TYPE OFNR c(ETL) TYPE OFNG	

TEMPERATURE RANGE	Storage	-30°C to + 80°C	
	Installation	-10°C to + 65°C	
	Operating	-20°C to + 70°C	
MAX. CRUSH RESISTANCE	2 Way	1200N/cm (685 lbs/in)	
	4 Way	1200N/cm (685 lbs/in)	
	7 way	1200N/cm (685 lbs/in)	
NOMINAL WEIGHT		kg/km	lbs/1000'
	2 way	52.1	35.0
	4 way	108.0	72.6
	7 way	163.3	109.8

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
FC9700009	2 way 5mm Multiduct, non-plenum
FC9700010	4 way 5mm Multiduct, non-plenum
FC9700011	7 way 5mm Multiduct, non-plenum

NOTES

- Standard lengths are 500 and 1000 feet, supplied on non-returnable reels. Ends are sealed to prevent the penetration of moisture prior to shipping.



4 Tesseneer Drive
Highland Heights, KY 41076-9753
Phone: 1-800-371-2178
Fax: 1-859-572-8530
www.blolite.net



A GenStone and General Cable Joint Venture Company