
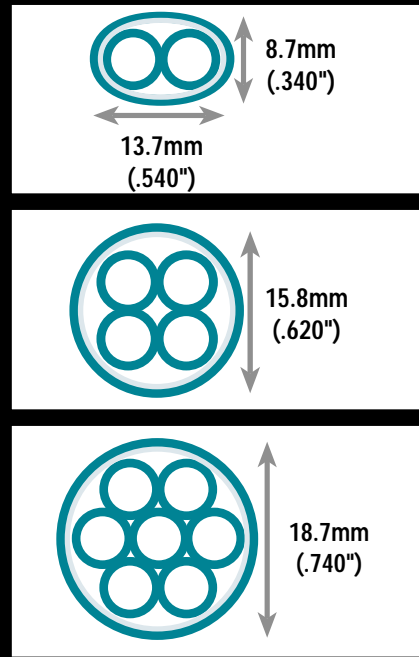


BLOLITE™ OUTDOOR 5mm MULTIDUCT

Outdoor-rated 5mm Multiduct consist of a number of 5mm OD/3.5mm ID Microducts (see 5mm Non-Plenum Microduct data sheet). The Microduct tubing is covered by an aluminum moisture barrier and an outer jacket. The number of Microduct constructions available are 2, 4 or 7. All Microducts are blue in color and are printed with a unique number at regular intervals. The overall jacket is a black medium-density polyethylene. The outer jacket surface has product identification printing and sequential length marking at one-meter intervals.

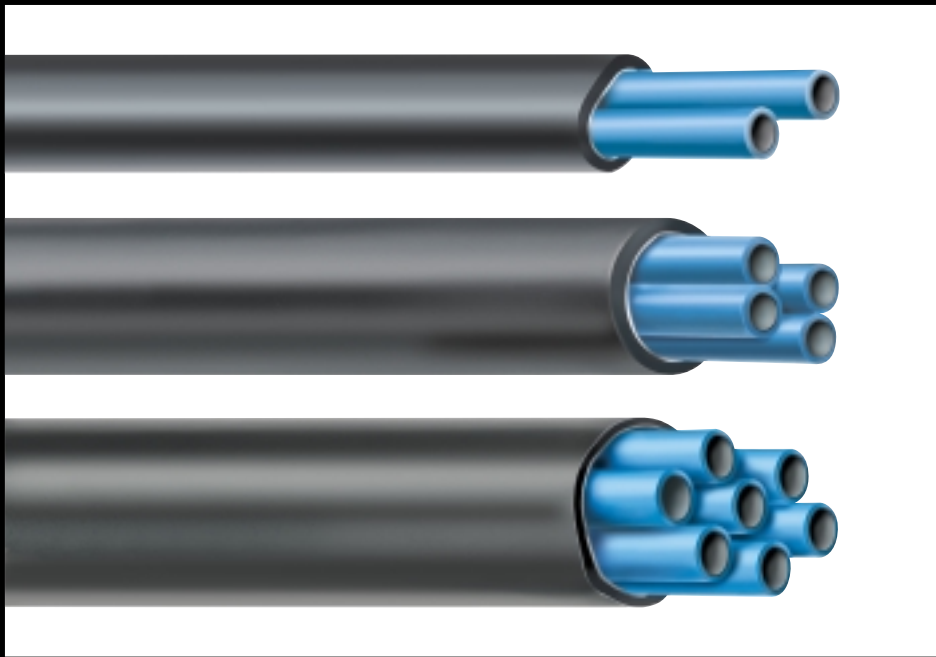

INSTALLATION TENSION	2 way	200N (45 lbs)
	4 way	350N (78 lbs)
	7 way	550N (123 lbs)

TEMPERATURE RANGE	Storage	-30°C to +80°C
	Installation	-10°C to +65°C
	Operating	-20°C to +70°C

MINIMUM BEND RADIUS INSTALLED INSTALLATION	10X Multiduct outer diameter
	20X Multiduct outer diameter

MAX. CRUSH RESISTANCE	2 Way	1200N/cm (685 lbs/in)
	4 Way	1200N/cm (685 lbs/in)
	7 way	1200N/cm (685 lbs/in)

MAX. INTERNAL PRESSURE	140 PSI
------------------------	---------

NOMINAL WEIGHT			kg/km	lbs/1000'
	2 way	87.0	58.4	
	4 way	142.3	95.7	
	7 way	205.5	138.1	

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
FC9700016	2 way 5mm Multiduct, outside plant
FC9700017	4 way 5mm Multiduct, outside plant
FC9700018	7 way 5mm Multiduct, outside plant

NOTES

1. Standard lengths are 500 and 1000 feet, supplied on non-returnable reels. Ends are sealed to prevent the penetration of moisture prior to shipping.



4 Tesseneer Drive
Highland Heights, KY 41076-9753
Phone: 1-800-371-2178
Fax: 1-859-572-8530
www.blolite.net



A GenStone and General Cable Joint Venture Company