
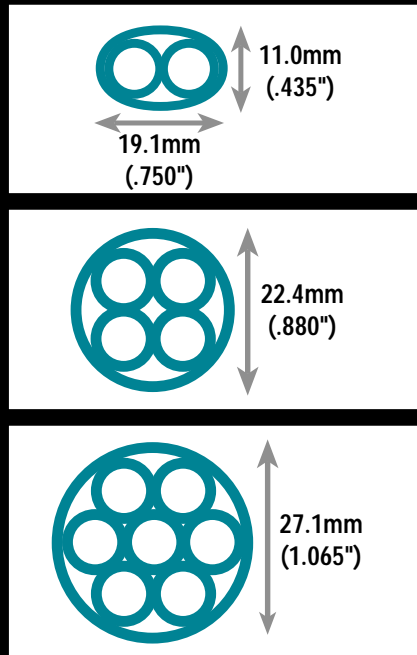


BLOLITE™ INDOOR NON-PLENUM 8mm MULTIDUCT

Riser-rated Multiduct consist of a number of 8mm OD/6mm ID Microducts (see 8mm Non-Plenum Microduct data sheet). The Microduct tubing is covered by an outer jacket. The number of Microduct constructions available are 2, 4 or 7. All non-plenum Microducts are blue in color and printed with a unique number at regular intervals. The overall jacket is a riser-rated PVC material colored orange. The outer jacket surface has product identification printing and sequential length marking at one-meter intervals.

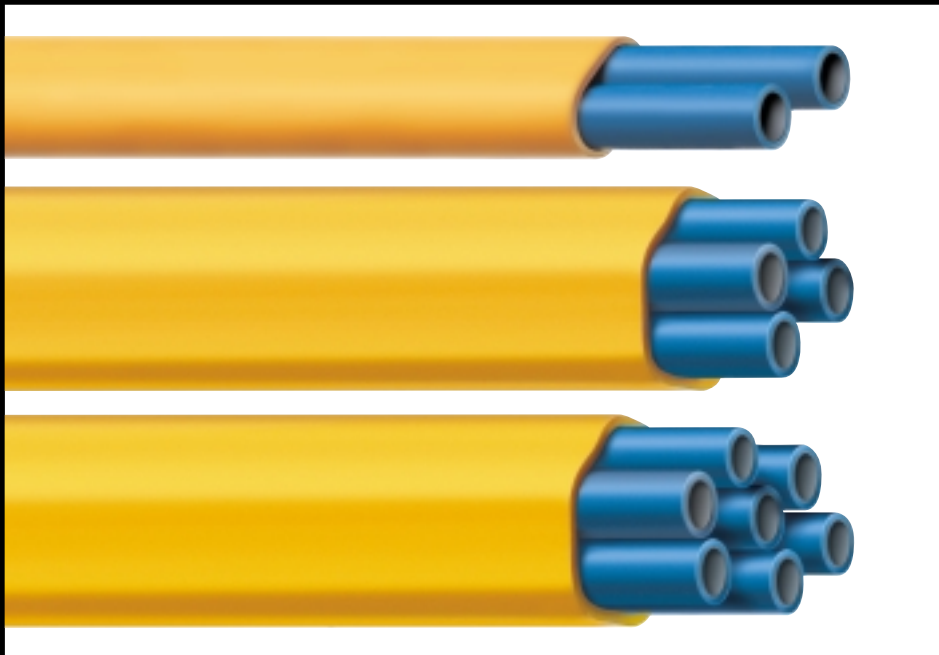

INSTALLATION TENSION	2 way	450N (101 lbs)
	4 way	750N (191 lbs)
	7 way	1100N (247 lbs)
MINIMUM BEND RADIUS INSTALLED INSTALLATION	10X Multiduct outer diameter	
	20X Multiduct outer diameter	
MAX. INTERNAL PRESSURE	140 PSI	
COMPLIANCE	ETL TYPE OFNR c(ETL) TYPE OFNG	

TEMPERATURE RANGE	Storage	-30°C to + 80°C	
	Installation	-10°C to + 65°C	
	Operating	-20°C to + 70°C	
MAX. CRUSH RESISTANCE	2 Way	1800N/cm (1030 lbs/in)	
	4 Way	1800N/cm (1030 lbs/in)	
	7 way	1800N/cm (1030 lbs/in)	
NOMINAL WEIGHT		kg/km	lbs/1000'
	2 way	176.3	118.5
	4 way	288.4	193.8
	7 way	421.4	283.2

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
FC9700013	2 way 8mm Multiduct, non-plenum
FC9700012	4 way 8mm Multiduct, non-plenum
FC9700015	7 way 8mm Multiduct, non-plenum

NOTES

- Standard lengths are 500 and 1000 feet, supplied on non-returnable reels. Ends are sealed to prevent the penetration of moisture prior to shipping.



4 Tesseneer Drive
Highland Heights, KY 41076-9753
Phone: 1-800-371-2178
Fax: 1-859-572-8530
www.blolite.net



A GenStone and General Cable Joint Venture Company