
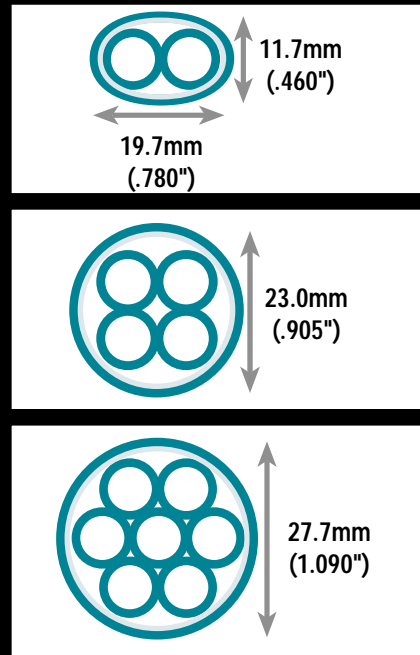


BLOLITE™ OUTDOOR 8mm MULTIDUCT

Outdoor-rated 8mm Multiduct consist of a number of 8mm OD/6mm ID Microducts (see 8mm Non-Plenum Microduct data sheet). The Microduct tubing is covered by an aluminum moisture barrier and an outer jacket. The number of Microduct constructions available are 2, 4 or 7. All Microducts are blue in color and are printed with a unique number at regular intervals. The overall jacket is a black medium-density polyethylene. The outer jacket surface has product identification printing and sequential length marking at one-meter intervals.

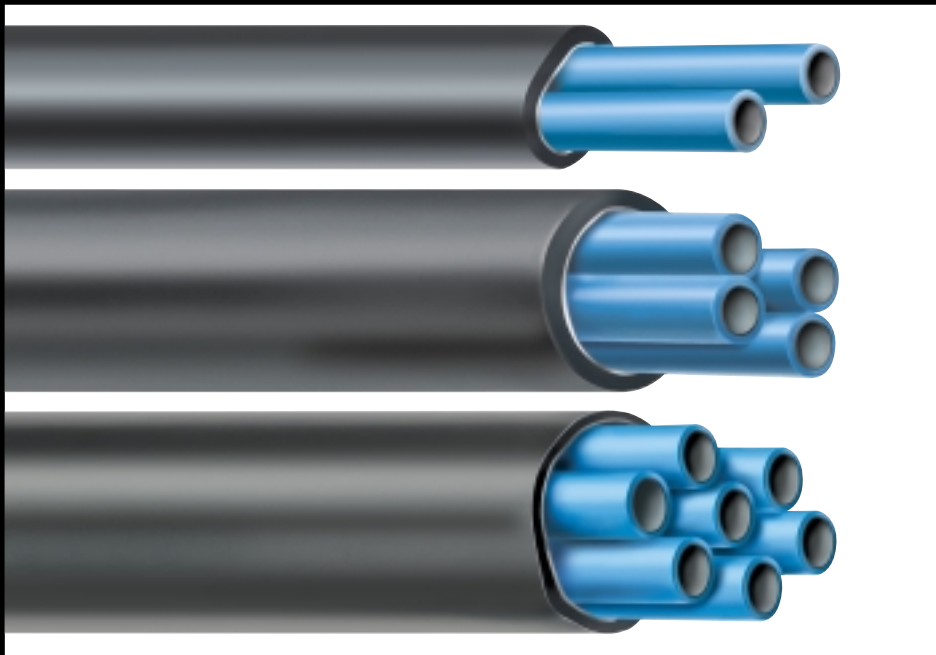

INSTALLATION TENSION	2 way	450N (101 lbs)
	4 way	750N (191 lbs)
	7 way	1100N (247 lbs)

TEMPERATURE RANGE	Storage	-30°C to +80°C
	Installation	-10°C to +65°C
	Operating	-20°C to +70°C

MINIMUM BEND RADIUS	INSTALLED	10X Multiduct outer diameter
	INSTALLATION	20X Multiduct outer diameter

MAX. CRUSH RESISTANCE	2 Way	1800N/cm (1030 lbs/in)
	4 Way	1800N/cm (1030 lbs/in)
	7 way	1800N/cm (1030 lbs/in)

MAX. INTERNAL PRESSURE	140 PSI
------------------------	---------

NOMINAL WEIGHT		kg/km	lbs/1000'
	2 way	150.4	101.1
	4 way	256.8	172.6
	7 way	383.3	257.9

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
FC9700019	2 way 8mm Multiduct, outside plant
FC9700020	4 way 8mm Multiduct, outside plant
FC9700021	7 way 8mm Multiduct, outside plant

NOTES

- Standard lengths are 500 and 1000 feet, supplied on non-returnable reels. Ends are sealed to prevent the penetration of moisture prior to shipping.



4 Tesseneer Drive
Highland Heights, KY 41076-9753
Phone: 1-800-371-2178
Fax: 1-859-572-8530
www.blolite.net



A GenStone and General Cable Joint Venture Company